

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L. L. P.

1300 I STREET, N. W.

WASHINGTON, DC 20005-3315

202 • 408 • 4000

FACSIMILE 202 • 408 • 4400

WRITER'S DIRECT DIAL NUMBER:

ATLANTA  
404 • 653 • 6400  
PALO ALTO  
650 • 849 • 6600

JC921 U.S. PRO  
09/11/228  
11/22/00

TOKYO

011 • 813 • 3431 • 6943

BRUSSELS

011 • 322 • 646 • 0353

(202) 408-4096

November 22, 2000

ATTORNEY DOCKET NO.: 04739.0069

CUSTOMER NUMBER: 22,852

**Box Patent Application**  
**Assistant Commissioner for Patents**  
**Washington, D.C. 20231**

New U.S. Patent Application  
Title: BROADCAST RECEIVING APPARATUS  
Inventor: Hiroyuki KANEMITSU

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. Application - 33 pages, including 6 independent claims and 13 claims total.
2. Drawings - 10 sheets of formal drawings containing 11 figures.
3. Declaration and Power of Attorney.
4. Recordation Form Cover Sheet and Assignment to TOYOTA JIDOSHA KABUSHIKI KAISHA
5. Certified copy of Japanese Application No. 11-350397 filed December 9, 1999.
7. The filing fee is calculated as follows:

JC921 U.S. PRO  
11/22/00

09/11/228 11/22/00

Assistant Commissioner for Patents

November 22, 2000

Page 2

					\$710	\$ 710.00
Basic Application Filing Fee	Number of Claims		Basic	Extra Claims		
Total Claims	13	-	20		x \$18	
Independent Claims	6	-	3	3	x \$80	240.00
[ ] Presentation of Multiple Dep. Claim(s)					+\$270	
					Subtotal	\$ 950.00
					Reduction by 1/2 if small entity	-
					TOTAL APPLICATION FILING FEE	\$ 950.00

8. A check for \$990.00 is enclosed. The fee includes:

\$710.00 filing fee;  
\$240.00 additional claims fee; and  
\$40.00 Assignment recordation fee.

Applicant claims the right to priority based on Japanese Application No. 11-350397, filed December 9, 1999.

Please address all correspondence with respect to this application to:

Finnegan, Henderson, Farabow,  
Garrett & Dunner, L.L.P.  
1300 I Street, N.W.  
Washington, D.C. 20005-3315

Please accord this application a serial number and filing date and record and return the Assignment to the undersigned.

EFC/FPD/bl  
Enclosures

# TITLE OF THE INVENTION

## BROADCAST RECEIVING APPARATUS

### BACKGROUND OF THE INVENTION

#### 5 Field of the Invention

The present invention relates generally to a broadcast receiving apparatus, and, more particularly, to an improvement in recording functionality (sound recording, image recording, etc.) of broadcast content (content) for such an apparatus. The

10 broadcast content may refer to the entirety of a program or a part of the program. The present invention is especially suitable for a transportable broadcast receiving apparatus, such as a car stereo system.

#### Description of the Related Art

15 Present forms of digital broadcasting include satellite, ground wave television, and ground wave radio broadcasting. Portable broadcast receiving apparatuses, including those mounted in vehicles, allow users to enjoy broadcasts or acquire useful information. Development advances toward practical digital music  
20 broadcasting adapted for vehicle or other mobile reception.

One digital broadcast receiving and reproducing apparatus equipped with a sound recording function is disclosed in Japan Patent Laid-open Pub. No. Hei 11-177511. All music received is temporarily recorded. Then, when the user issues a designation of  
25 recording, the recording of a designated song is determined. It is thereby possible to avoid a recording errors or failure stemming from an inadvertent mistake, such as a user forgetting to program the recording operation prior to the start of a broadcast.

It is, however, possible for broadcast recording to fail, even

no mistakes have been made. For example, variations in the status of reception may lead to data being lost, thereby rendering the recording defective. A receiving apparatus equipped with a function also providing appropriate measures against this type of failure in recording is therefore desired. Presently, however, recording management relies on a user's own memory. If a recording has once failed, the user must remember to seek and record the same broadcast content later.

On the other hand, a user may forget that they have already recorded a particular broadcast and then record the same broadcast content once again. Duplicate recording wastes recording memory capacity and, from this viewpoint, this is also a failure in recording. Presently, as stated above, to avoid such a failure, recording managed relying on a user's own memory.

The above deficiencies are particularly outstanding in vehicle-mounted broadcast receiving apparatuses, as will be described hereinbelow.

It remains uncommon for vehicle-mounted broadcast receiving apparatuses to have a recording function for recording images or sounds. However, as digital broadcasting becomes more common, it will be possible for even mobile equipment to create high-quality recordings. It is therefore preferred that mobile or vehicle-mounted broadcast receiving apparatuses also be equipped with recording functions.

However, the status of reception a portable unit is subject to large variation as a result of motion. Even slight movement of the unit may cause a shift from a receivable state to an unreceivable state. Some sites may be unreceivable in certain locations. Such variation in the status of reception experienced midway through

recording could lead to complete failure of recording. In this manner, irrespective of the convenience arising from an capability to record broadcast content while moving, it is disadvantageous if there is a high risk of failure in recording.

5 Known portable receiving apparatuses are also disadvantageous from the viewpoint of double recording as described above. Because transportable broadcast receiving apparatuses are configured to be relatively small in size, their memory capacity may also be restrained. In addition, the spatial restraint in the  
10 operation devices such as switches may also lead to omission of a function for a user to readily check the already recorded broadcast content. Furthermore, some vehicles, such as family automobiles, are used by a plurality of users so that broadcasting content recorded by one user may be recorded again by another user.

15 Although, the description was made focusing on the related art problems involved with portable broadcast receiving apparatuses, such problems are not limited to mobile apparatuses.

#### SUMMARY OF THE INVENTION

The present invention was conceived in view of the above  
20 problems. It is therefore an object of the present invention to provide a broadcast receiving apparatus equipped with a function for appropriately dealing with potential failure which may occur during broadcast recording.

25 In order to achieve the above object, according to a first aspect of the present invention there is provided a broadcast receiving apparatus comprising reception means for receiving broadcast content and incidental information allowing identification of the broadcast content; recording means for recording the broadcast content received; and rerecord promotion

means for promoting, when recording of a broadcast content has ended in failure, the recording of an alternate broadcast providing the same content as in the failed recording, decided on the basis of the received incidental information.

5 As used herein, broadcast content refers to, for example, songs or pieces of music in a music broadcast, or images and sound in a television broadcast. The broadcast content may refer to the entirety of a broadcast program, or to a part of a broadcast program (e.g., each song in a music program). Incidental information sent

10 together with the broadcast content is used for the identification of the broadcast content, and more specifically this information preferably contains identification information and schedules of the broadcasting content. The identification information can contain any information available for the identification. The  
15 incidental information is preferably program sequence information standardized in digital broadcasting. The program sequence information can be used to identify and retrieve specific broadcast content.

According to the present invention, when the attempted  
20 recording of broadcast content has failed, the incidental information is used as a basis for searching for an alternative broadcast content providing the same content. For example, a search is made for a rebroadcast of the program of which recording ended in failure. In another example, a search is made for another  
25 broadcast of song, the recording of which ended in failure. Promotion of recording of such alternative broadcast content enables restoration of a failed recording.

The rerecord promote means may perform recording reservation processing of the alternative broadcast content. The alternative

1  
Y  
broadcast is automatically recorded to achieve the initial  
recording object. The rerecord promote means may post the user on  
information on the alternative broadcast content.

According to a second aspect of the present invention there  
5 is provided a broadcast receiving apparatus comprising reception  
means receiving broadcast content and incidental information  
allowing identification of the broadcast content; record means  
recording the broadcast content received; and linkage processing  
means linking together, when recording of a broadcast content has  
10 ended in failure, broadcast content that is positioned immediately  
before and after the broadcast content of which recording has ended  
in failure, by use of the incidental information.

According to the present invention, two broadcast content is  
linked together that are positioned immediately anterior and  
15 posterior to a broadcast content of which recording has ended in  
failure. For example, upon the recording of a music program, data  
on a failingly recorded song are deleted and data on songs  
immediately before and after the failed song are linked together.  
By virtue of this, when reproducing the recorded broadcast content,  
20 reproduction is advantageously prevented from being interrupted  
on the midway.

In particular, use of the incidental information allows an  
easy recognition of a pause at the trailing end of the broadcast  
content anterior to a failure and a pause at the leading edge of  
25 the broadcast content posterior to the failure. Therefore, the  
broadcast content after linkage can smoothly continue at the linkage  
portion, to enable the influence of the failure in sound recording  
to be suppressed.

Preferably, the broadcast receiving apparatus further



comprises supplement means acquiring an alternative broadcast content providing the same broadcast content as the broadcast content of which recording has ended in failure, on the basis of the incidental information, the supplement means inserting the  
5 acquired alternative broadcast content into the linkage portion, to thereby achieve the supplement of the broadcast content. By virtue of this, the broadcast content lost due to the failure is obtained to achieve acquisition of a full broadcast content.

It is to be understood in linkage of the broadcast content  
10 that the data need not actually be arrayed on the record medium. It will suffice that the broadcast content is correlated with each other so as to be reproducible in a successive manner.

The preferred broadcast receiving apparatus of the present invention further comprises failure information presentation means  
15 presenting information on a failure in broadcast content recording to the user. This enables the user to readily recognize which broadcast content has failed in appropriate recording.

According to a third aspect of the present invention there is provided a broadcast receiving apparatus comprising reception  
20 means receiving broadcast content and incidental information allowing identification of the broadcast content; record means recording the received broadcast content together with the incidental information; and obviation processing means comparing incidental information on a broadcast content to be newly recorded  
25 with incidental information on broadcast content that have already been recorded in the record means, to thereby obviate double recording of broadcast content.

According to the present invention, it can be judged by use of the incidental information whether the same broadcast content

is about to be recorded once again. This avoids a vain memory consumption arising from the double recording.

The obviation processing means may post the user on the presence of the same broadcast content that has already been recorded. The obviation processing means may prohibit recording of the same broadcast content as an already recorded broadcast content.

As set forth hereinabove, according to the present invention, effective use is made of incidental information, e.g., digital broadcast program sequence information, fed together with the broadcast content, whereby improved measures against a failure in the broadcast recording are provided to render the broadcast receiving apparatus convenient.

It will be appreciated that the aspects of the present invention are not limited to the receiving apparatus. Other aspects of the present invention can include, e.g., a broadcast reception method, a broadcast recording apparatus or method, and a record medium having thereon recorded a broadcast recording program to be executed by the computer of the broadcast receiving apparatus.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a general configuration of a broadcast receiving apparatus according to a first embodiment of the present invention;

Fig. 2 illustrates EIT information contained in a digital broadcast signal;

Fig. 3 illustrates a recording failure information display process effected by the broadcast receiving apparatus of Fig. 1;

Fig. 4 is a flowchart showing a sound recording process

effected by the broadcast receiving apparatus of Fig. 1;

Fig. 5 is another flowchart showing the sound recording process effected by the broadcast receiving apparatus of Fig. 1;

Fig. 6 is a block diagram showing a general configuration of a broadcast receiving apparatus according to a second embodiment of the present invention;

Fig. 7 illustrates a content linkage process performed after a failure in sound recording by the broadcast receiving apparatus of Fig. 6;

Fig. 8 is a flowchart showing a sound recording process effected by the broadcast receiving apparatus of Fig. 6;

Fig. 9 is a block diagram showing a general configuration of a broadcast receiving apparatus according to a third embodiment of the present invention;

Fig. 10 is a flowchart showing a sound recording process performed by the broadcast receiving apparatus of Fig. 9; and

Fig. 11 illustrates the present invention embodied in the form of a computer.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will now be described with reference to the drawings which illustrate example preferred embodiments thereof. These examples and drawings are provided to explain, and not to limit, the invention.

##### Embodiment 1

Fig. 1 shows a general configuration of a broadcast receiving apparatus in accordance with a first preferred embodiment of the present invention. In this first embodiment, the present invention is applied to a digital broadcast receiver installed in a motor vehicle.

In the following description, a "music program" typical of music broadcasting is described as an example of broadcast programs to be received. As used herein, "one-unit broadcast content" refers to individual "songs or pieces of music" making up the music program. The broadcast content is hereinafter referred to simply as "content".

Referring first to Fig. 1, the broadcast receiving apparatus is generally designated as 1 and comprises an antenna 3 receiving digital broadcast signals, a data demodulation unit 5 demodulating the broadcast signals received by the antenna 3 into digital data, a control processing unit 7 providing a control of the entire receiver, a recorder 9 for recording the received data, a decoder 11 generating audio signals and visual signals for output, a speaker 13 and a display 15 providing the audio signals and the visual signals as their respective outputs, and an input device 17 operated by a user.

The recorder 9 can be one capable of recording data by use of an electrical, magnetic, or optical technique, such as a hard disk, a memory card, or the like. A recording medium can be removably mounted on the recorder 9.

A digital broadcast signal sent to the receiving apparatus 1 includes content and incidental information. In the example illustrating this embodiment, description is made mainly of music content, as stated above. Recording or other processes in accordance with the present invention will apply to image and sound in television broadcasting content as they do to music content, although the output modes differ. The incidental information, on the other hand, is digital broadcast program sequence information which will be described later.

09717228 112200

The music content is demodulated by the date demodulation unit 5, converted by the decoder 11 into output signals, and provided as outputs from the speaker 13. Images enhancing the music experience may be received and appear on the display 15. The demodulated content is recorded by the recorder 9. The thus recorded content is thereafter read out for reproduction. The input device 17 accepts user requests such as selection, sound recording, reproduction, and reservation of content.

It is preferable to employ the following processing for the recording process. That is, it is preferable to temporarily hold the received content, irrespective of whether the content is actually recorded, to save the content. Then, only when the user has performed a sound recording operation, the sound recording of the temporarily held content is determined. In the absence of the sound recording operation, the temporarily held content is deleted when the song has completed, or when the memory has become full. In this way, users are able to record a complete song, even when they do not decide to record that song until midway through playback.

Information allowing identification of the content can be received as incidental information. More specifically, information containing content identification and schedule information in any form is preferred.

This embodiment makes effective use of the program sequence information as one form of incidental information. The program sequence information may be as defined in defined in "Program sequence information for use in digital broadcasting" (ARIB STD-B10) standard established by the Association of Radio Industries and Businesses. According to these standards, EPG (electric program guide) is acquired from EIT (event information

table).

EIT information is received by the antenna 3 at a predetermined interval (e.g., every two seconds). The EIT information is demodulated by the data demodulation unit 5, and then processed by the control processing unit 7.

Ordinary use of EIT includes extracting desired information through the EIT information analysis by the control processing unit 7. Information to be displayed is acquired from the EIT information in response to user operation of the input device 17. The thus acquired information is processed for output, sent to the decoder 11 for conversion into visual signals, and then displayed on the display 15.

The EIT information contains information corresponding to the television and radio schedules published in newspapers. For example, a stream of EIT information contains information on program schedules and program content of each of a plurality of channels lying within that stream. The receiving apparatus and broadcasting system may be configured so as to acquire plural streams of information (information in the form of in-reception and out-of-reception streams).

As shown in Fig. 2, the standards allow the EIT information to contain various descriptors, which may be, for example, a shortened format event descriptor a indicative of the title of a program, a content descriptor b indicative of the genre of the program, and an extended format event descriptor c indicative of information on the explanation of the program. The extended format event descriptor includes plural items of information set therein. That is, set in the music broadcast are a plurality of items such as the song title, artist, and composer.

The EIT information contains information indicating the start and end time of each content item. For example, from the EIT is obtained information on the start time and length of each song in a music program, and from this the ending time is obtained.

5 Referring back to Fig. 1, of the recording related processing of the present invention utilizing the EIT information as incidental information for identification in the content record will next be described.

10 The control processing unit 7 comprises, for features related to the present invention, an EIT analysis unit 21, a sound record failure judgment unit 23, a failure information posting unit 25, an alternative content retrieval unit 27, and a rerecord promote processing unit 29. The rerecord promote processing unit 29 includes an alternative content sound record reservation unit 31 and an alternative content presence posting unit 33.

15 The EIT analysis unit 21 analyzes the above-described EIT information to acquire various related information. By using the EIT information, it is possible to identify all content and acquire additional information.

20 The sound record failure judgment unit 23 judges whether sound recording of music content by the recorder 9 has ended in failure. The judgment of presence or absence of the sound record failure is made on a content-by-content (i.e., song-by-song) basis.

25 For judging sound record failure, information as to whether or not data demodulation error correction by the data demodulation unit 5 is possible is relied on. This information is sent from a correction possible/impossible judgment unit 5a to the control processing unit 7. When the motor vehicle moves, the status of reception may vary. If the vehicle should pass through an area of

poor reception, sound data to be recorded may not be correctly be obtained. Incomplete or incorrectly received data results in error correction being impossible. When the error correction is infeasible, it is judged that a sound record failure has occurred.

5           Recording failure is not attributable to only the state of reception. The sound record failure judgment unit 23 monitors data writing of the recorder 9 and, when a write error is detected, it is similarly judged that a sound record failure has occurred.

10           The failure information posting unit 25 provides the user with information on the sound recording failure. For example, the unit performs processing for recording the title of the song for which recording failed, the title of the program, the ratio of unrecorded data, etc., together with processing for the display on the display 15. The failure information may be included, for posting, in the full sound record results. As shown in Fig. 3, for example, on the display 15 there appears a table indicating whether or not sound recording has successfully been completed.

15           The alternative content retrieval unit 27 retrieves an alternative content providing the same content as the content for which sound recording ended in failure. In this case, the content is a "song". The same song is thus retrieved as the song for which sound recording has ended in failure.

20           The retrieval is made by use of EIT information. The EIT information contains information corresponding to a programming schedule of a newspaper. The schedule of songs to be broadcast in each program are obtained from the EIT information. Information on target song is thus retrieved to obtain information on a program broadcasting the song, the channel, and broadcast time of the program and the target song.



09717228-112200

The rerecord promote processing unit 29 performs processing for promoting the recording of the alternative content retrieved. The rerecord promote processing unit 29 includes the alternative content sound record reservation unit 31 and the alternative content presence posting unit 33. The alternative content sound record reservation unit 31 makes an automatic reservation of sound recording of the alternative content. The alternative content presence posting unit 33 provides information on the existence of an alternative content (including time, channel, etc.) to the user by way of the display 15.

Fig. 4 is a flowchart showing an example processing of the sound recording related to the above-described features. When the user performs a sound recording operation, the processing shown in Fig. 4 starts. The sound recording operation includes a sound recording designating operation of a program and a sound recording reservation designating operation.

In the processing shown in Fig. 4, EIT information is first analyzed to acquire information (event information) such as extended format event descriptors and shortened format event descriptors (S10). Sound recording is made of target content selected by the user (S12) and it is judged whether or not the sound was successfully recorded (S14). If affirmative, then EIT information on the sound recording target is recorded together with the content (S16). The recorded information contains the above event information and can be utilized for identification of the recorded content.

On the other hand, if it is judged in S14 that the sound recording has ended in failure, retrieval of an alternative content is made by use of the EIT information (S18). The user is then posted

on failure information (S20). In this case, as described above, the failure information appears on the display. The speaker may generate an alarm sound or a speech sound to inform the user of recording failure. Sound recording reservation processing of the alternative content is then automatically carried out (S22) to bring the processing to an end. The receiving apparatus enters a sound recording standby mode, in which operates the alternative content sound recording reservation unit 31 of the rerecord promote processing unit 29.

When the next broadcast time arrives, it is very possible that the motor vehicle may not be in use, with the broadcast receiving apparatus switched off. In such an event, the apparatus will retrieve the next alternative content and reserve sound recording of that next choice. This applies, where appropriate, to the subsequent processes as well.

Fig. 5 is a flowchart showing another example of sound recording processing effected by the apparatus of Fig. 1. S10 to S16 are the same as Fig. 4. The most significant difference from the device shown in Fig. 4 lies in processes subsequent to the detection of a sound recording failure at S14.

In this configuration, if the decision is negative in S14, an alternative content is retrieved (S30) and the user is informed of failure (S32). The user is then informed of the existence of an alternative content (S34). The alternative content presence posting unit 33 of the rerecord promote processing unit 29 posts alternative content information on the display. When no alternative contents can be found within the obtained EIT information, that fact is displayed.

When a future content is found, the user is then asked whether

or not sound recording of the alternative content is to be reserved (S36). The query may appear on the display, be provided as audible output from the speaker, or both. When the reservation is designated through operation of an input device by the user, the sound recording reservation is carried out (S38), thereafter allowing a migration to the sound recording standby mode, to thereby terminate the processing. If the user makes no designation concerning reservation, the processing merely comes to an end.

As set forth hereinabove, according to the first embodiment, when recording of certain content (broadcast content) has ended in failure, an alternative content providing the same content is searched for on the basis of the incidental information. In the above example, the alternative content is obtained by finding out another music program broadcasting of the song for which recording failed. Alternative content recording is promoted to enable restoration of a failed recording.

As discussed above, the rerecording promotion may be achieved by the alternative content automatic recording reservation processing. The user may be posted on information on the alternative content source. Fig. 4 illustrates the automatic recording reservation being carried out. Fig. 5 shows the automatic recording reservation being executed after the user is informed and user consent is obtained. The automatic reservation processing is convenient because the alternative content is automatically acquired and recorded so that the initial recording object can be achieved. The scope of the present invention covers performing either of the automatic reservation and user posting or performing another rerecording promotion.

In the example used to illustrate the first embodiment, the

broadcast receiving apparatus was mounted on a motor vehicle. In vehicles the status of reception will vary to a large extent depending on the movement thereof. For this reason, even in systems where broadcasting can be recorded while the vehicle is moving, there will be a high risk of recording failure. By employing the present invention embodied as described above, it becomes possible to cope expediently with a recording failure, to facilitate the advantage of the broadcast receiving apparatus for vehicles.

This embodiment allows information on the content recording failure to be provided to the user. Thus, the user can readily recognize for which content recording has failed and choose among options for appropriate recording of that content.

#### Embodiment 2

A second preferred embodiment of the present invention will next be described.

Fig. 6 shows a broadcast receiving apparatus 41 in accordance with the second embodiment of the present invention. Differing the apparatus depicted in Fig. 1, the control processing unit 7 of the apparatus 41 additionally includes a linkage processing unit 43 and a supplement processing unit 45. When a failure occurs in content recording, the linkage processing unit 43 performs processing for linking together content immediately anterior and posterior to the content of which sound recording has failed. The supplement processing unit 45 performs processing for separately acquiring the content of which sound recording has failed, for supplement. For these processings, effective use is made of the EIT information which is one form of the incidental information.

Fig. 7 shows functions of the linkage processing unit 43 and the supplement processing unit 45. An example will be described

in which songs A, B, C and D of a music program X have been sound recorded in a successive manner and that, due to the passage of a motor vehicle through a an area of poor reception while recording song B, data on the song B have partially been lost, resulting in  
5 a failure of recording of the song B.

Based on EIT information analyzed by the EIT analysis unit 21, the linkage processing unit 43 acquires the start time and duration of each song broadcast during the program. From this information, the ending time of each song is also obtained. On the  
10 basis of this information, the songs A and C are linked together that are positioned immediately anterior and posterior to the song B, recording of which has ended in failure. Thus, the songs A, C and D are sequentially arrayed in the described order.

Data within the recorder 9 is subjected to this linkage  
15 processing . It is, however, obvious that data need not actually be physically arrayed in a linear order on a recording medium. It will suffice that the content (songs A, C and D) be correlated with one another so as to be reproducible in a successive manner.

After linkage processing, an alternative content of the lost  
20 content is retrieved in the manner described above for the first embodiment. That is, information on the next broadcast of song B is retrieved from EIT information being currently received. Then, the supplement processing unit 45 executes the sound recording reservation processing of the song B. After the acquisition of the  
25 song B, it is inserted into the linkage portion between the songs A and C to provide a complete version of lost song B.

Nevertheless, the motor vehicle and the broadcast receiving apparatus may be off during the broadcast of the alternative content (song B). In this event, as described previously, still another

alternative content is retrieved for the reservation of sound recording when the motor vehicle is turned back on.

Fig. 8 is a flowchart showing an example of the above processing. When the sound recording operation is performed by the user, the processes of Fig. 8 start. The EIT information is analyzed to acquire information from the extended format event descriptor, the shortened format event descriptor, etc. (S40). Target content is sound recorded (S42) and it is judged whether or not sound recording thereof has successfully been made (S44). If all the songs are successfully sound recorded, then the EIT information about the sound recording targets is recorded together with the content (S46). The EIT information contains the above event information and can be utilized for identification of the content recorded.

On the contrary, if it is judged in S44 that the sound recording of content (song) has ended in failure, then deletion is made of the content (song) of which sound recording has ended in failure, to link together the content that is positioned immediately anterior and posterior to that content (S48). The user is then provided with failure information indicative of a sound recording failure (S50). A list is preferably displayed that includes failed content and successful content (acquired content). A post-linkage content list is also provided on the display.

The user is then prompted as to whether or not the user wishes the failed content to be rerecorded for supplement (S52). For the query, the display or the speaker is preferably used. When the user designates the supplement, an alternative content is retrieved (S54) and sound recording reservation processing is performed (S56), entering the sound recording standby mode to terminate the series

of processes. If no supplement is designated, the processing comes to an end intact.

As set forth hereinabove, according to the present invention, the content positioned immediately before and after the content for which sound recording has ended in failure is linked together that are. In the above example, data on a song of which sound recording has ended in failure is deleted, and data on songs that are positioned immediately before and after that song are linked together. By virtue of this, upon the reproduction of the recorded broadcast content, interruption in reproduction can be prevented.

In the second embodiment, especially, the end of the preceding song and the beginning of the next song are determined for linkage on the basis of information on start time, etc., contained in the EIT information. In this manner, the present invention acquires and utilizes incidental information that contains information indicating pauses of content. It is thereby possible to readily recognize a pause at the trailing edge of the pre-failure broadcast content and a pause at the leading edge of the post-failure broadcast, whereupon the broadcast content after linkage can smoothly continue through the linkage portion so that the influence of the sound recording failure is suppressed as much as possible.

Furthermore, unrecorded content is separately acquired for supplement. This processing is carried out by making effective use of the incidental information. This achieves the initial object, i.e., recording of the full broadcast content into the recorder 9.

### Embodiment 3

A third preferred embodiment of the present invention will next be described.

Fig. 9 shows a broadcast receiving apparatus 51 in accordance with the third embodiment. As compared with the apparatus shown in Fig. 6, the control processing unit 7 of the apparatus 51 additionally comprises a double recording obviation processing unit 53 which includes a double recording judgment unit 55, a double recording inhibition processing unit 57 and a double recording posting processing unit 59.

The double recording judgment unit 53 compares EIT information on content to be recorded in the recorder 9 with EIT information already recorded in the recorder 9 in correlation with the content, to judge whether or not any double recording has been designated.

The double recording judgment processing will next be described in greater detail.

When content is initially recorded into the recorder 9, EIT information on the content is recorded therein together with the content. By referring to this EIT information, content already recorded can be identified and specified.

Note that there is no need to record all items of EIT information related to each content. The EIT information contains various information such as extended format event descriptors, shortened format event descriptors, etc. The extended format event descriptor allows a plurality of items to be set therein. It will be sufficient to extract required information from those pieces of information for recording. This applies to the apparatus of all the embodiments without being limited to an apparatus configured according to the third embodiment of the present invention.

Provided that the content is a single song, only information required for identifying the song need be recorded. This



information may be the title of the song, or the sign or number for identifying the song. Naturally, even more items of information may be recorded therein and could be utilized for other applications. For linkage processing in the above embodiment, it will be preferable to record information on the beginning and end of the song as well.

After the user has designated new content to be recorded, this designation may be given by a record designating operation of the content on the air or by a reservation designating operation thereof.

EIT information then being received is analyzed by the EIT analysis unit 21 to acquire EIT information on content to be recorded. Reference is made to EIT information on each of content item recorded in the recorder 9. Comparison is made among this information to judge whether or not a content to be recorded has already been recorded in the recorder 9. If the judgement is affirmative, it is determined that double recording is about to be carried out.

The double recording judgment is made on a content-by-content basis. For example, in case of designation of sound recording of a music program, judgement whether or not the content has already been recorded is made for each song.

When double recording is detected, the double recording obviation processing unit 53 executes processing for obviating the double recording. Herein, the double recording inhibition processing unit 57 and the double recording posting processing unit 59 operate. The double recording inhibition processing unit 57 inhibits writing of the content to be recorded into the recorder 9. The double recording posting unit 59 informs the user of the fact that the content has already been recorded, by means of the

display 15 and the speaker 13. The display 15 preferably provides a list of the already recorded content. Alternatively, a list of all content to be recorded may bear the presence or absence of recording of each content. The speaker 13 issues a double  
5 recording alarm in the form of speech sounds or alarm sounds.

In the apparatus of the third embodiment, the user is asked whether or not specific content is to be recorded even though that content has previously been recorded. If execution is designated, then the content is recorded. This will be useful in a case, such  
10 as that which will be described next.

By way of example, sound recording of an entire music program may be designated. Some users may wish to record the entire program, even though some of the content is duplicated. In this case, acceding to the user's request, double recording is allowed.

15 Fig. 10 is a flowchart showing an example of the above processing. When the user performs a sound recording operation, the processing of Fig. 10 is initiated. EIT information is analyzed so that information is acquired from extended format event descriptors, shortened format event descriptors, etc. (S60). Then,  
20 it is judged whether a content has already been recorded or not, i.e., whether or not a duplicate sound recording is about to be made(S62).

If in the decision at S62 is negative, then a target content is recorded (S64). Although not shown in Fig. 10, when the recording  
25 has ended in failure, the failure measures processing described earlier is carried out. If the recording is successful, then the EIT information is recorded as information for identifying the recorded content (S66) to thereby complete the sound recording process.

If, on the other hand, the decision at S62 is affirmative, recording of the target content is inhibited (S68) and the user is informed that the content has already been recorded (S70). At that time, a list of the recorded content appears on the display.

5       The user is then queried as to whether or not he or she wishes to record the content, even though it has already been recorded (S72). The display 15 and the speaker 13 are utilized for the query. If the decision at S72 is affirmative, then the sound recording is released from inhibition and allowed in compliance with the  
10 designation (S74). If negative at S72, then the processing comes to an end.

As set forth hereinabove, in this third embodiment, the EIT information can be used to judge whether or not content (broadcast content) is about to be recorded a plurality of times. This makes  
15 it possible to avoid wasteful memory consumption as a result of unnecessary double recording.

It will be understood that, as described above, the user may be warned of the presence of duplicate content in the obviation processing. Recording of content already recorded may be  
20 prohibited. The present invention includes performing either of the two obviation processings or performing a different obviation processing.

Similar to the first and second embodiments, the apparatus of the third embodiment provides distinct and valuable advantages  
25 for applications in vehicles such as motor vehicles.

Due to its relative small-sized configuration, the mobile broadcast receiving apparatus may have a restricted memory capacity. Also, due to the spatial restraint of the operation devices such as switches, etc., it may not be possible to include the function

allowing the user to readily check the recorded broadcast content in order to prevent the double recording. Furthermore, as the apparatus may often be used by a plurality of users, content recorded by one person may be recorded again by another person.

5 In this manner, the broadcast receiving apparatus for vehicles provides convenient capability for recording broadcast content while moving, but disadvantageous in the that double recording is possible. According to the present invention, it is possible to obviate double recording in an effective manner and  
10 to promote the advantages of the broadcast receiving apparatus for vehicles.

While preferred embodiments of the present invention have hereinbefore been described, it will be appreciated that the present invention is not limited to the above embodiments and that  
15 those skilled in the art can modify the examples used to illustrate embodiments without departing from the scope and spirit of the present invention.

For example, in the above embodiments, the present invention has been applied to the receiving apparatus adapted for MPEG2 but  
20 is not limited thereto. The present invention is applicable to other types of digital broadcasting and also to analog broadcasting as long as it is possible to receive information for identifying the content.

The present invention is not limited to vehicle-mounted  
25 receiving apparatuses but may be applied to any portable broadcast receiving apparatus. For example, the present invention is applicable to a handheld receiving apparatus, such as a personal stereo system. The present invention is similarly applicable to the now popular handheld terminal apparatuses, such as those

equipped with a position detecting function.

Furthermore, the present invention is applicable to fixed receiving apparatuses, though the effects of the present invention are more remarkably demonstrated when embodied in mobile receiving apparatuses.

The above embodiments have assumed each of songs making up a music program as one unit of the content (broadcast content). As opposed to this, an entire music program may form one content. In this case, the alternative content is preferably obtained by retrieval of a rebroadcast program. For the double recording obviation, it is preferred to obviate the double recording of the rebroadcast program. The unit of content may be an aggregate of a plurality of programs. In contrast, a content unit may be each of a plurality of elements obtained as a result of division of a single song. This will be especially effective for longer songs.

It is obvious that the content (broadcast content) should not be limited to music. The present invention is equally applicable to broadcasts of the other content. The present invention is similarly applicable to both a television broadcast or a radio broadcast. In the case of television, the unit of the content may be a single program, a part thereof, or an aggregate of a plurality of programs. In summary, the content is any mass of data on content of a broadcast itself.

The above embodiments have made use of EIT information as information for identification of content. The recorder 9 has also recorded the EIT information correlated with each content. For the processing thereof, use may be made of only the required information within the EIT information. That is, extraction, use, or recording may be made of just the information necessary for the content

identification and other processings. For example, recorded are the titles of item of the extended format event descriptors, the broadcast start time, and the duration. This applies also to the use of incidental information other than the EIT information.

5           The present invention may otherwise be implemented as a method and a recording medium, as well as an apparatus. As a recording medium, recorded thereon is a program that allows a computer to execute the processes of the present invention. A program for implementing the processes of the present invention may be  
10 incorporated in the form of, e.g., a module into a program for processing digital broadcast signals. The medium is any medium configured to be computer readable by way of electrical, magnetic, or optical means. In the Fig. 1 apparatus, the control processing unit may be a computer, in which case the recording medium is  
15 contained in, e.g., a peripheral storage device or within the computer.

Referring finally to Fig. 11, a broadcast receiving apparatus is shown by way of example that is made up of a CD-ROM 58 employed as an example of the storage medium, and a computer 60 having a  
20 processing program, etc., installed therein. Other than the CD-ROM, the storage medium can be for example a floppy disk, a magnetic disk, a magnetic tape, a RAM, a flash memory, an optical memory disk, a DVD, etc. The computer 60 may receive digital broadcast signals through an antenna not shown or by way of a modem 62, as  
25 examples. Naturally, the present invention could be embodied as a portable computer or a computer installed in the likes of a motor vehicle and would provide similar functions and present similar effects as in the examples used in the above embodiments.

As set forth hereinabove, according to the present invention,



WHAT IS CLAIMED IS:

1. A broadcast receiving apparatus comprising:

reception means for receiving broadcast content and  
5 incidental information allowing identification of said broadcast  
content;

record means for recording said received broadcast content;  
and

10 rerecord promote means for promoting, when recording of a  
broadcast content has ended in failure, the recording of alternative  
broadcast content providing the same content as said failed  
broadcast content, on the basis of said incidental information.

2. The broadcast receiving apparatus according to claim 1,  
15 wherein

said rerecord promote means perform recording reservation  
processing of said alternative broadcast content.

3. The broadcast receiving apparatus according to claim 1,  
20 wherein

said rerecord promote means outputs to the user information  
on said alternative broadcast content.

4. A broadcast receiving apparatus comprising:

25 reception means for receiving broadcast content and  
incidental information allowing identification of said broadcast  
content;

record means for recording said broadcast content received;  
and



linkage processing means for linking together, when recording of a broadcast content has ended in failure, broadcast content that is positioned immediately before and after said broadcast content of which recording has ended in failure, by use of said incidental  
5 information.

5. The broadcast receiving apparatus according to claim 4, further comprising:

10 supplement means for acquiring an alternative broadcast content providing the same content as said broadcast content of which recording has ended in failure, on the basis of said incidental information, said supplement means inserting said acquired alternative broadcast content into the linkage portion.

15 6. The broadcast receiving apparatus according to claim 1, further comprising:

failure information presentation means for presenting to the user information related to a failure in broadcast content recording.

20

7. The broadcast receiving apparatus according to claim 4, further comprising:

25 failure information presentation means for presenting to the user information related to a failure in broadcast content recording.

8. A broadcast receiving apparatus comprising:

reception means for receiving broadcast content and incidental information allowing identification of said broadcast content;

record means for recording said received broadcast content together with said incidental information; and

obviation processing means for comparing incidental information for content to be newly recorded with incidental  
5 information of content that has already been recorded by said record means, to thereby preclude double recording of broadcast content.

9. The broadcast receiving apparatus according to claim 8, wherein

10 said obviation processing means outputs to the user information on the presence of the same broadcast content that has already been recorded.

10. The broadcast receiving apparatus according to claim 9,  
15 wherein

said obviation processing means prohibits recording of content that is identical to content already recorded.

11. A program storage device readable by a machine, tangibly  
20 embodying a program of instructions executable by the machine to perform steps for reception of broadcast content, said steps comprising the steps of:

receiving broadcast content and incidental information that enables said broadcast content to be identified;

25 recording said broadcast content received;

promoting, when recording of a broadcast content has ended in failure, the recording of an alternative broadcast content that provides the same content as said failed broadcast content, on the basis of said incidental information.

12. A program storage device readable by a machine, tangibly embodying a program of instructions executable by the machine to perform steps for receiving broadcast content, said steps

5 comprising the steps of:

receiving broadcast content and incidental information that enables said broadcast content to be identified;

recording said broadcast content received;

10 linking together, when recording of a broadcast content has ended in failure, content that is positioned immediately before and after said content of which recording has ended in failure, on the basis of said incidental information.

13. A program storage device readable by a machine, tangibly  
15 embodying a program of instructions executable by the machine to perform method steps for receiving broadcast content, said method steps comprising the steps of:

receiving broadcast content and incidental information that enables said broadcast content to be identified;

20 recording said received broadcast content together with said incidental information;

comparing incidental information of a broadcast content to be newly recorded with incidental information of broadcast content that has already been recorded in said record means, to thereby  
25 perform processing precluding double recording of broadcast content.

ABSTRACT OF THE DISCLOSURE

A broadcast receiving apparatus is equipped with a function appropriately dealing with a failure in broadcast recording. Along  
5 with broadcast content, incidental information allowing identification of the broadcasting content is received. The incidental information is preferably digital broadcast program sequence information. The receiving apparatus records the received broadcast content. When recording of certain content  
10 fails, an alternative broadcast content providing the same content is retrieved on the basis of the incidental information, and recording thereof is promoted by a rerecord promote processing unit. The recording of the alternative broadcast content is reserved or the user is alerted to the existence of the alternative broadcast.  
15 The incidental information is effectively utilized to link together sound recorded content positioned immediately before and after the content of which sound recording has ended in failure. Furthermore, effective use is made of the incidental information to obviate double recording of content so that memory is conserved.

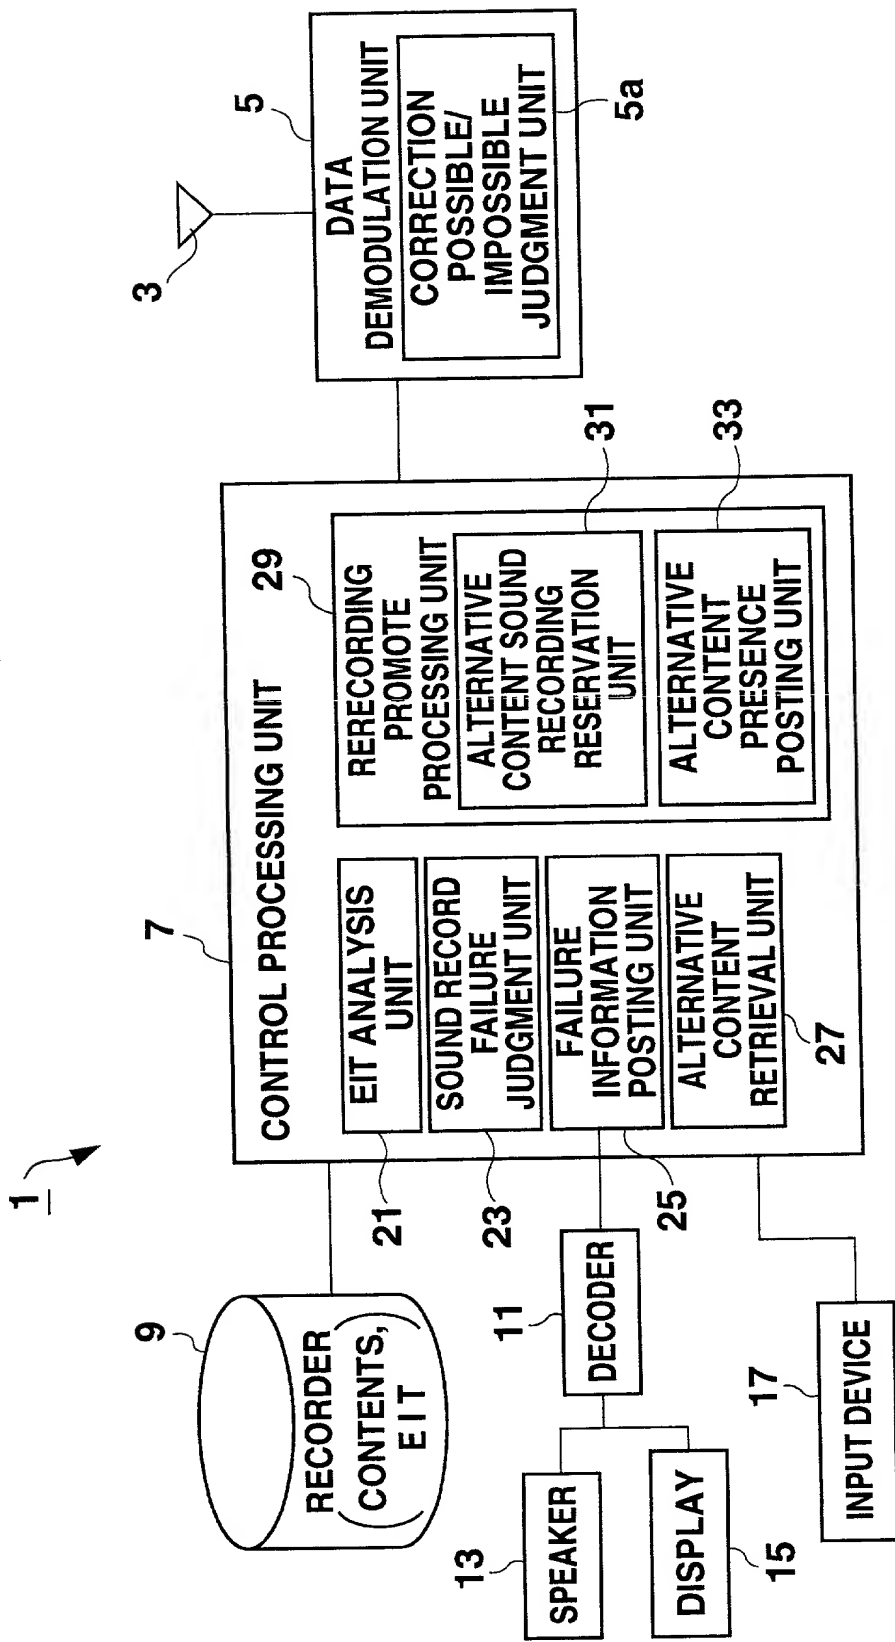


Fig. 1

EIT (EVENT INFORMATION TABLE)

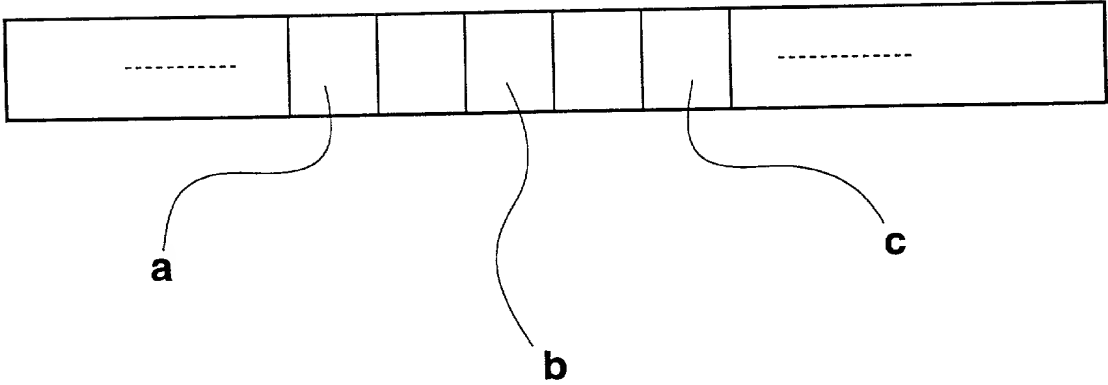


Fig. 2

PROGRAM    × × × ×	
TITLE OF SONG	RECORDING SUCCESS OR FAILURE
A   A   A   A	○
B   B   B   B	×
C   C   C   C	○
D   D   D   D	○
⋮	⋮

Fig. 3

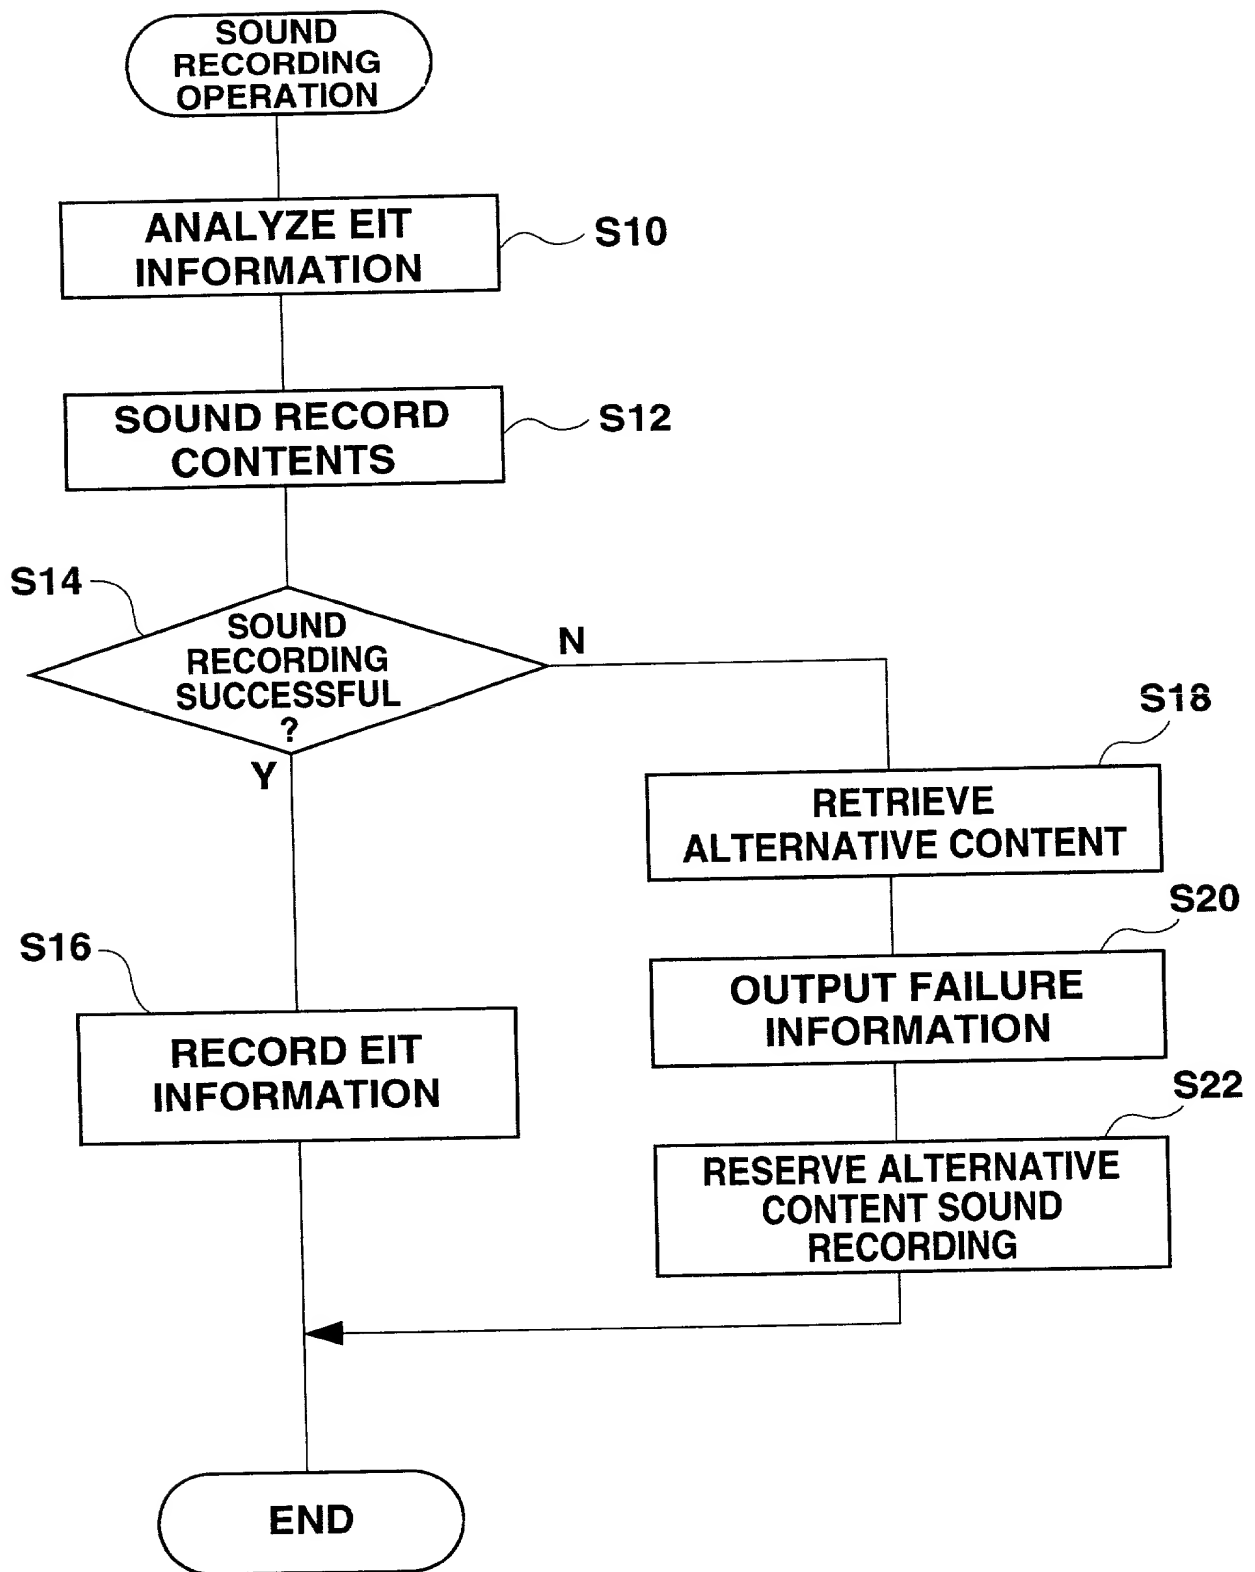


Fig. 4

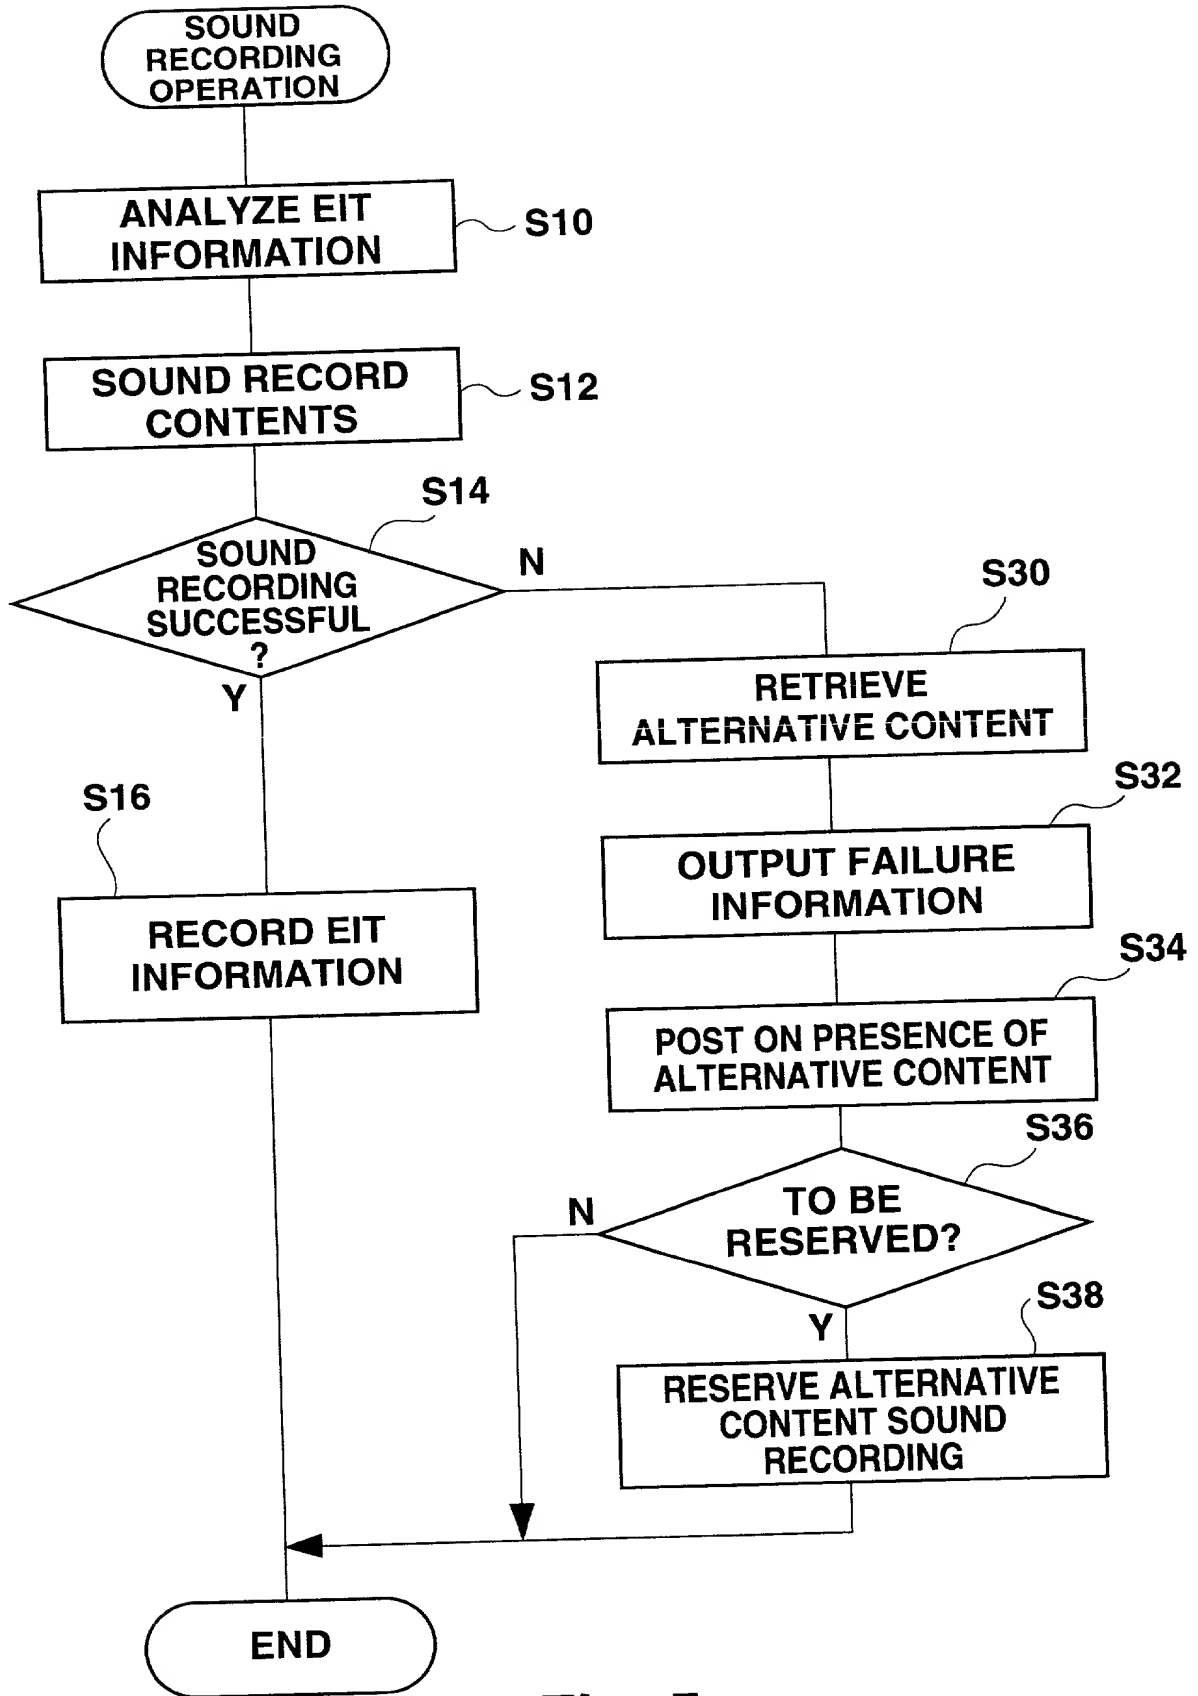


Fig. 5



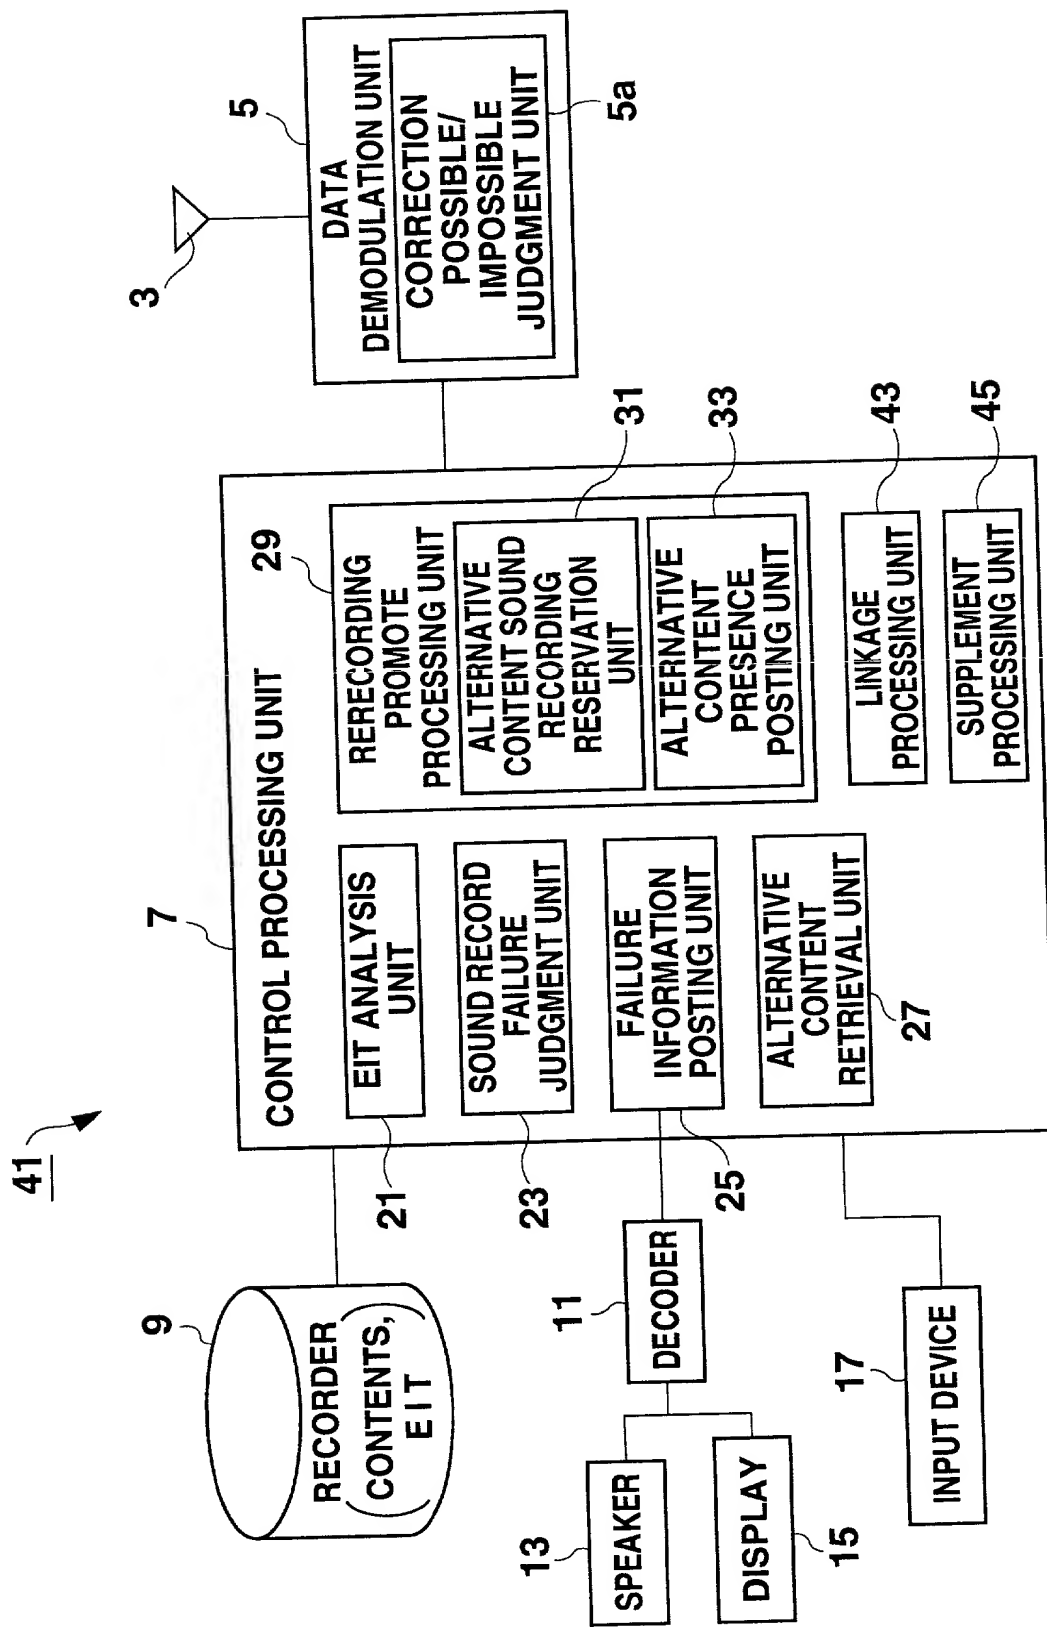


Fig. 6

09717228 112200

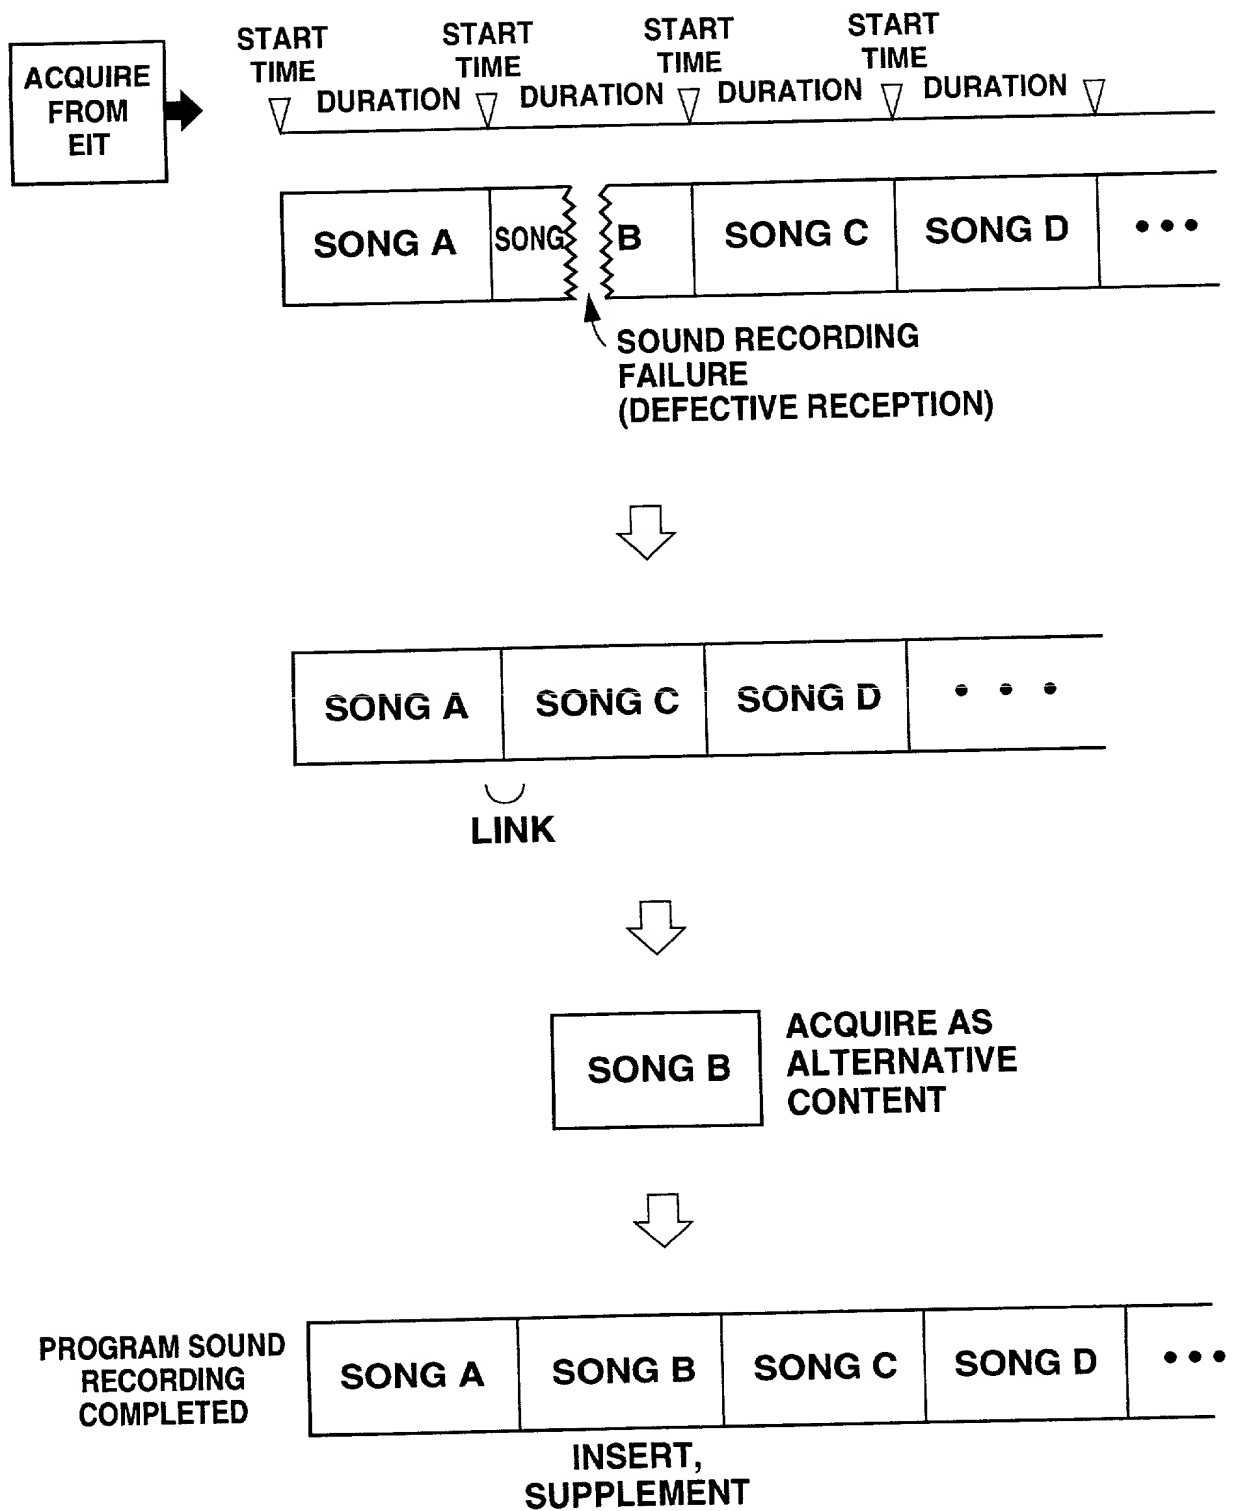


Fig. 7

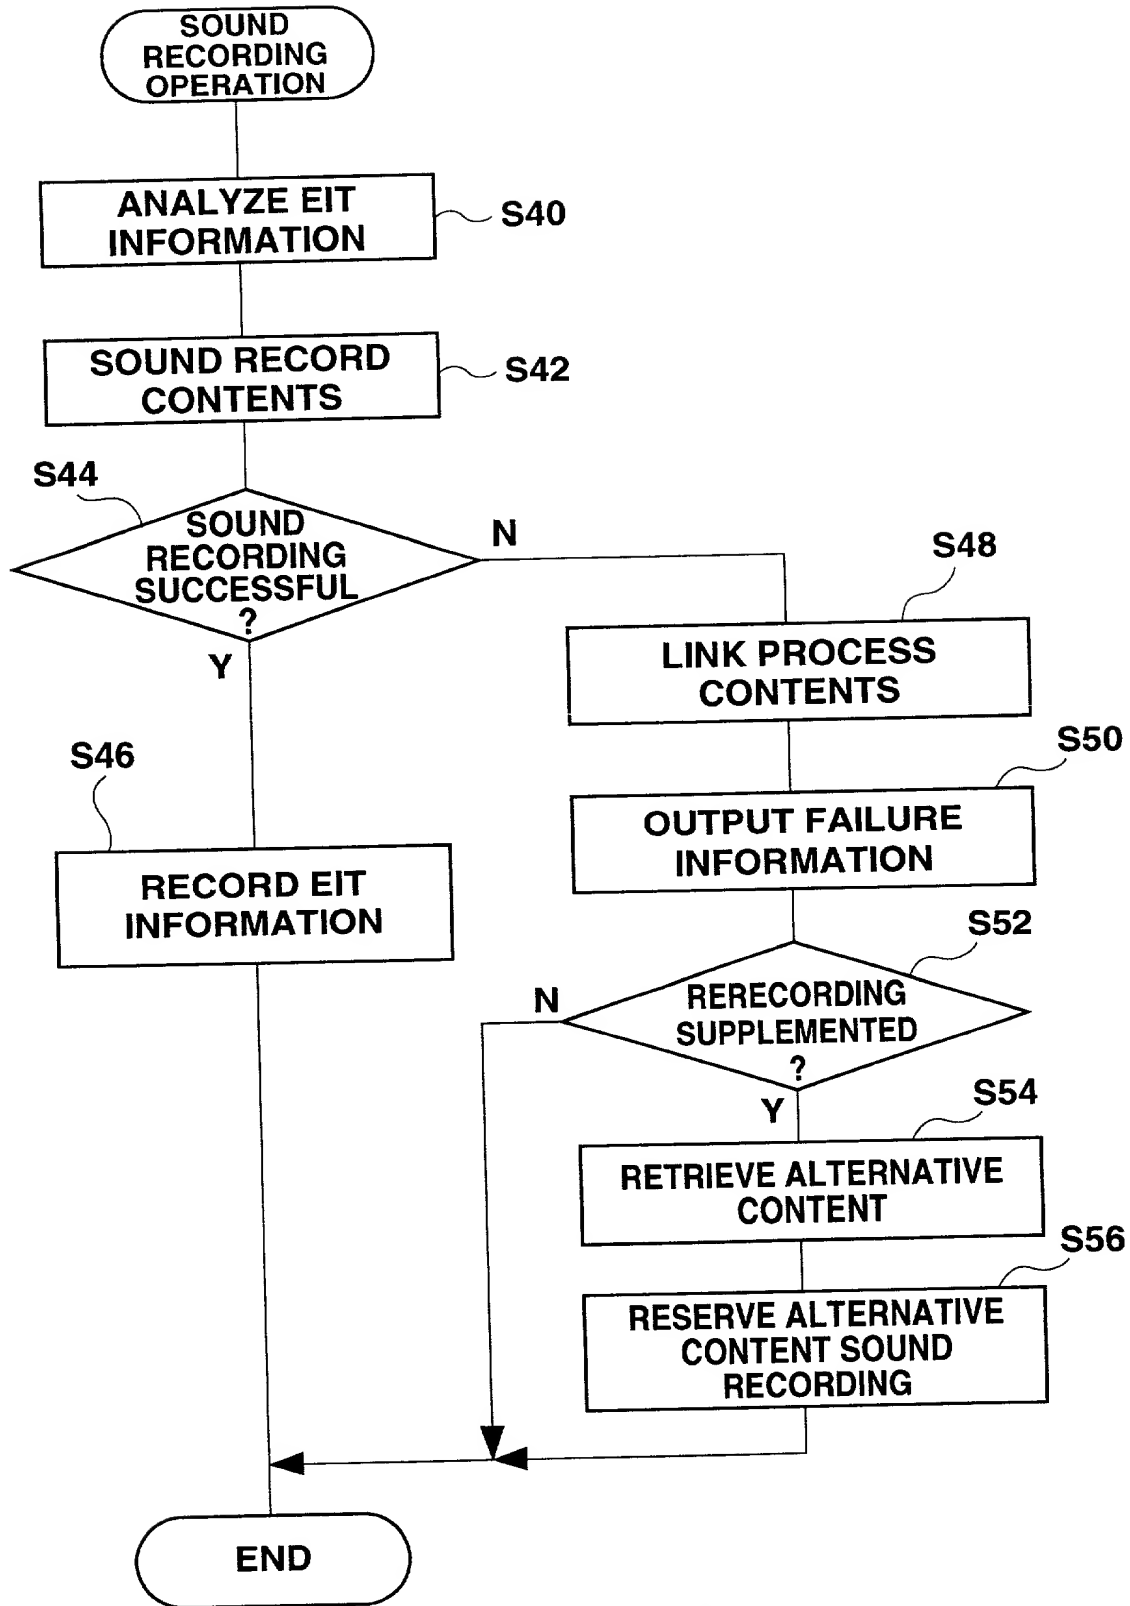


Fig. 8

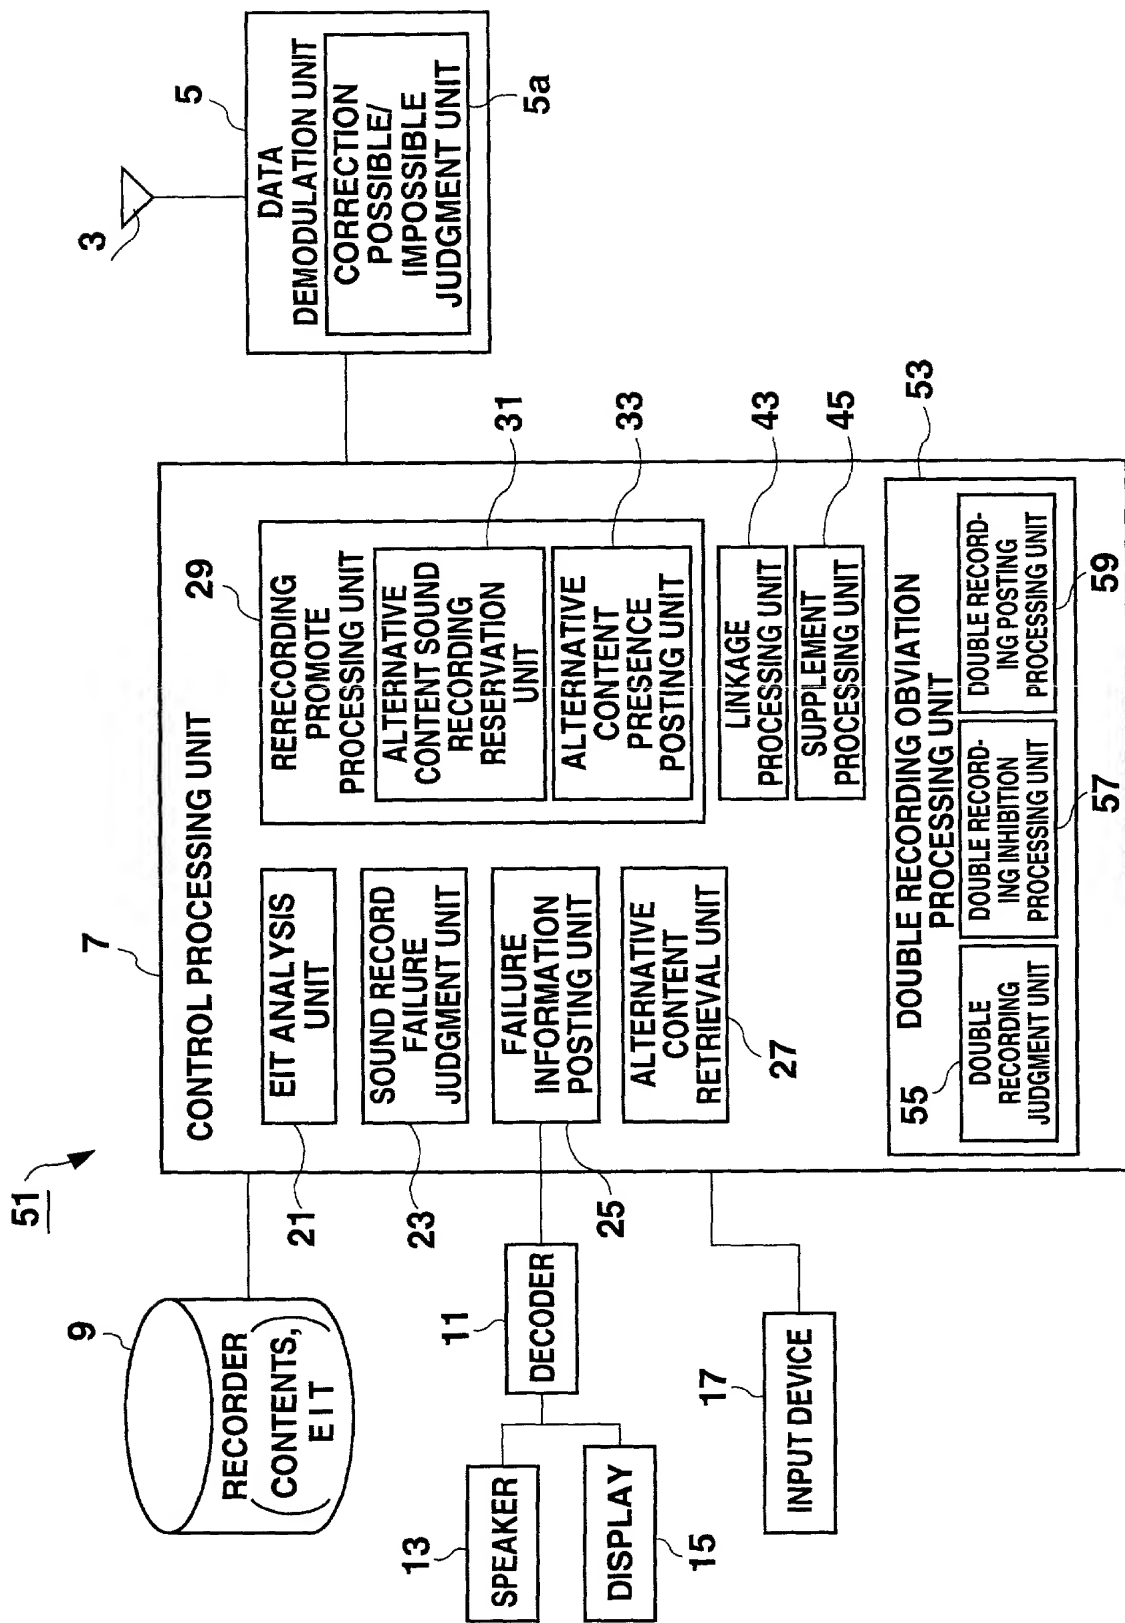


Fig. 9

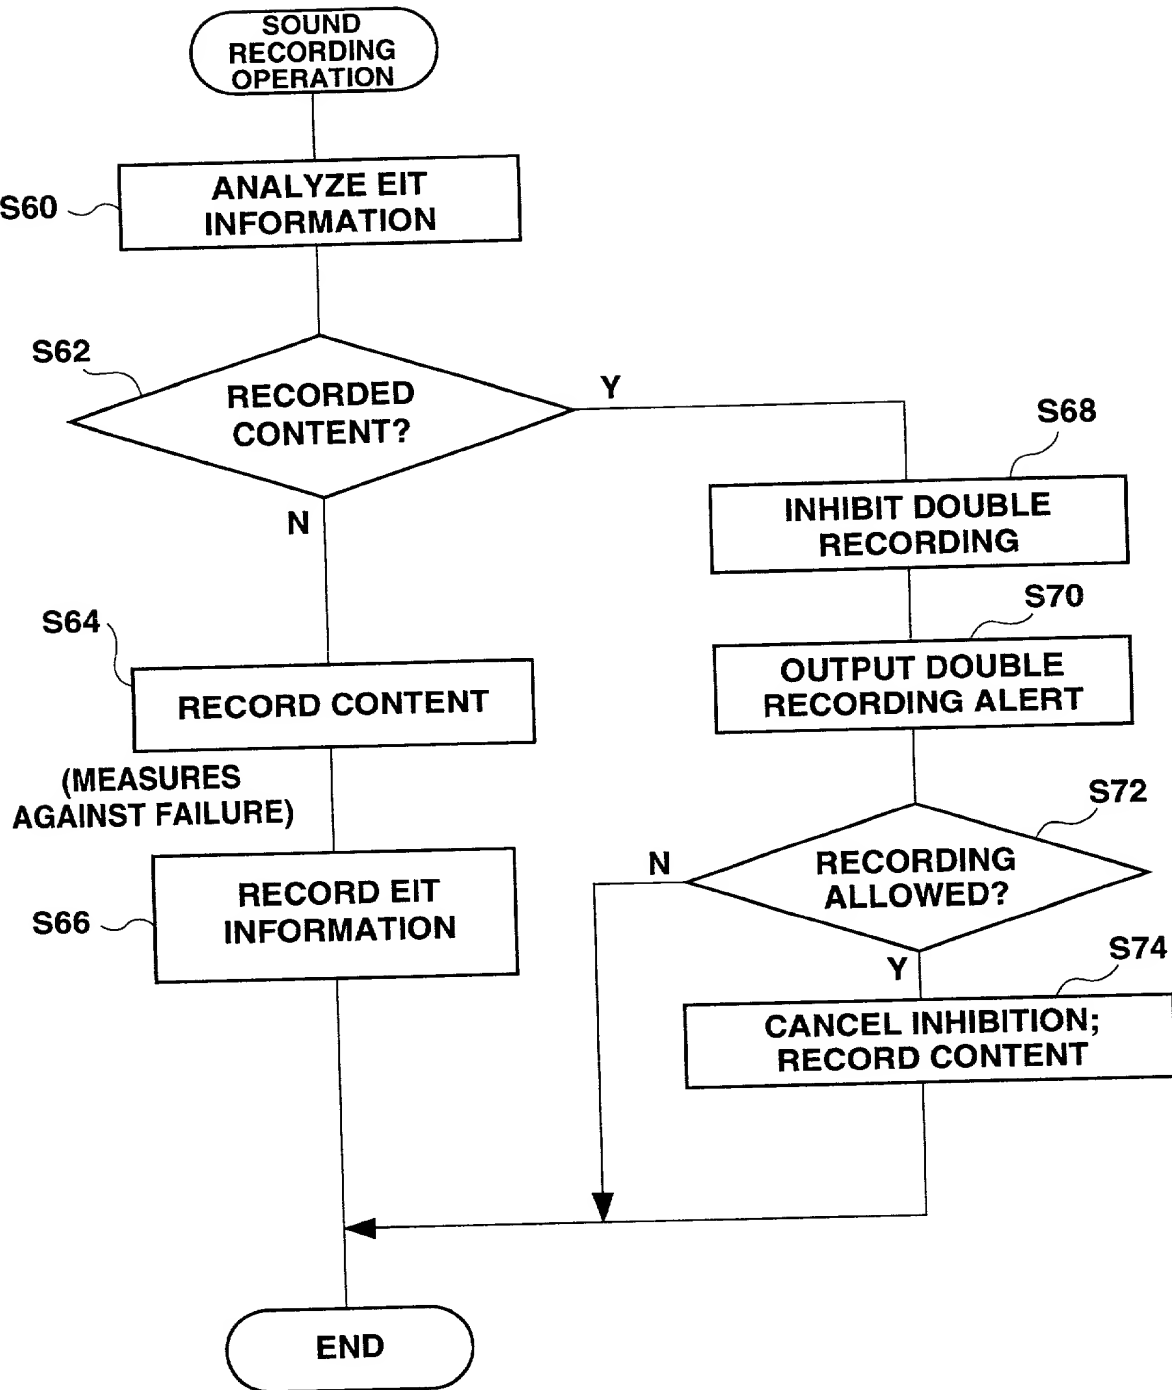
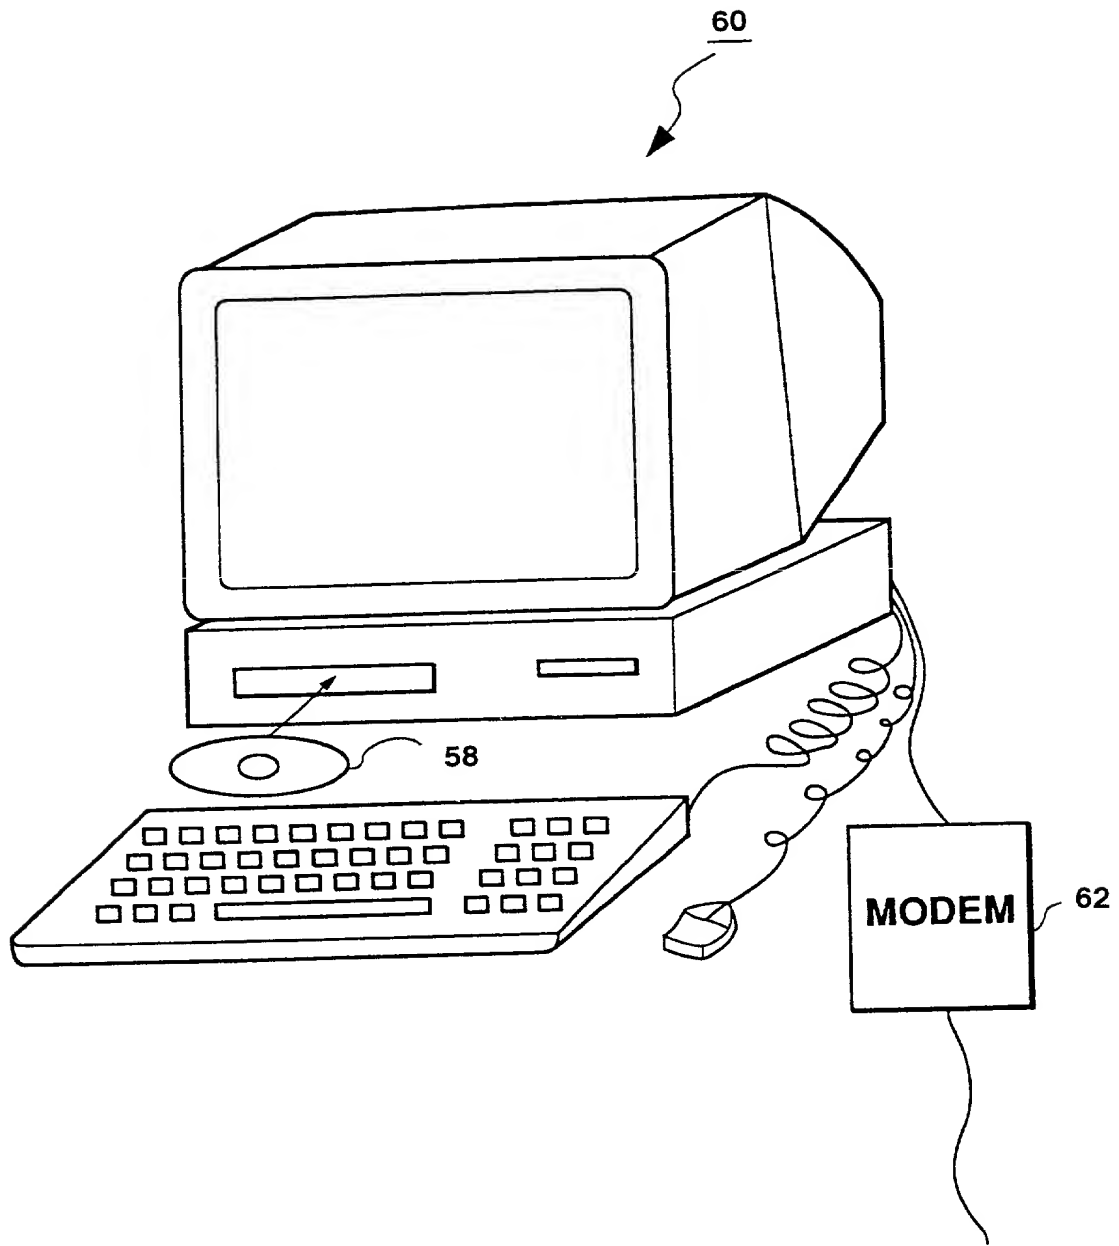


Fig. 10



**Fig. 11**

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

BROADCAST RECEIVING APPARATUS

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ \_\_月\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
（該当する場合）\_\_\_\_に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

## Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米 国以外の国の少なくとも一カ国を指定している特許協力条約 365 (a) 項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

Hei 11-350397

(Number)  
(番号)

Japan

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

9/December/1999

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米 国特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米 国特許出願に記載された権利、又は米 国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米 国特許出願に開示されていない限り、その先行米 国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



# Japanese Language Declaration

委任状：私は、下記発明者として、以下の弁理士及び代理人、またはそのいずれかをここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を米国特許商標庁に対して行うことを委任する。(代理人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list agent's name(s) and registration number(s))

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Eimer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zoller, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajelsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Thomas W. Banks, Reg. No. 32,719; M. Paul Barker, Reg. No. 32,013; Bryan C. Diner, Reg. No. 32,409; Christopher P. Isaac, Reg. No. 32,616; Andrew C. Sonu, Reg. No. 33,457; Dirk D. Thomas, Reg. No. 32,600

書類の送付先：

Send Correspondence to:

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.  
1300 I STREET, N.W.  
WASHINGTON, D.C. 20005-3315

直通電話連絡先：(名称及び電話番号)

Direct Telephone Calls to: (name and telephone number)

ARTHUR S. GARRETT  
202-408-4091

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor	
	Hiroyuki KANEMITSU	
同発明者の署名	日付	Inventor's signature Date
		Hiroyuki Kanemitsu Oct. 13, 2000
住所	Residence	
	Susono-shi, Shizuoka-ken, Japan	
国籍	Citizenship	
	Japan	
郵便の宛先	Post Office Address	
	c/o TOYOTA JIDOSHA KABUSHIKI KAISHA 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 Japan	

第二の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any	
同第二発明者の署名	日付	Second inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便の宛先	Post Office Address	

(第三またはそれ以降の共同発明者に対しても同様な情報及び署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)